

TRIO COMBINED 162



BVM 951, automatic vending machine for hot and cold drinks with 26 direct selection push buttons and up to 48 selections.

BVM 676, refrigerated automatic spiral vending machine for the sale of snack, cans and bottles customisable in Slave versions.

Combined they can work in master/slave with an only payment system on the hot vending machine.

It is a complete solution with 26 selections of hot and cold drinks combined with other 40 selections, up to 48, with a capacity of 274 products in can & bottle version and 398 products in Snack version.

Great versatility of configurations that allows multiple combinations able to satisfy the different sales requests for a wide range of products.

Compatible with all the most advanced communication protocols. Door lock with programmable code.

Switching power supply that guarantees total stability of the instant product dose and complete electric safety protections.

Predisposition, without any interface, for GPRS module for the remote control of the vending machine.

Flash microprocessor technology programmable in Windows environment for PC or with Palm PC (Visual Smart Programmer).



BVM 951

E4S Espresso Version: coffee beans, 4 instant canisters + sugar, equipped with Bianchi Vending patented espresso group.

6S Instant Hot Version: 6 canisters for instant beverages.

6SF Instant Hot/Cold Version: 6 canisters for instant beverages, cold still and instant cold carbonated drinks and cold drinks from bag in box products.

DIMENSIONS: height: 1643 mm / width: 607 mm / depth: 697 mm / weight: 110 k.

ELECTRICAL SUPPLY

230 Vac - 50 Hz / 120 Vac - 60 Hz

INTERNAL ELECTRICAL SUPPLY

All the electrical components are supplied at 24 Vac/Vdc, with the exception of the boiler resistances, the pump and the steam ventilator that are at 230 Vac - 50 Hz or at 120 Vac - 60 Hz.

POWER SUPPLY

1.80 kW espresso version

2.20 kW instant version

WATER SUPPLY

Fitting connection = 3/8"

Water pressure = 0.5 - 6.5 bar

PRODUCT CAPACITY

Coffee beans	3.5 k
Instant coffee	1.2 k
Powder milk	1.7 k
Whitener	3.2 k
Chocolate	3.6 k
Lemon tea	3.3 k
Tea	1.7 k
Soup	3.6 k
Sugar	4.0 k
Spoons	400 pcs
Cups	500 pcs

USER INTERFACE: 26 direct push buttons that can be configured both as direct selections or pre-selections. End selection acoustic signal to render the use of the vending machine simple and immediate. Customisable sugar dosage. Ergonomic commands that can be used by minors and disabled people. 32 digit alphanumeric LCD display.

BVM 676

BVM 676 CAN & BOTTLE Version: n° 1 trays for snack products, n° 3 trays for 1/2 L PET bottles, n° 1 trays for cans or tetrapak.

BVM 676 SNACK Version: uniform temperature with n° 5 trays for snack products, n° 1 trays for 1/2 L PET bottles.

VENDING CAPACITY: CAN & BOTTLE version up 274 pcs., SNACK version up to 398 pcs., up to 48 selections and 50 programmable selling prices.

DIMENSIONS: height: 1620 mm / width: 700 mm / depth: 820 mm / weight: 200 Kg.

APOWER SUPPLY

230 Vac - 50 Hz / 120 Vac - 60 Hz

POWER ABSORPTION

0,32 kW


TECHNICAL CHARACTERISTICS: Isolated door. Refrigerating unit: 1/4 HP with automatic defrost control. Ecological refrigerating gas: R134 A.

INTERNAL TEMPERATURE: Adjustable inner temperature. Standard version: up to +6°C with ambient temperature of 32°C and 65% humidity. Programmable Pan version: up to +3°C with ambient temperature of 32°C and 65% humidity. Health control safety device available in 6 tray version (on the last two) and in the 5 tray version (on the last). Should the electronic sensor detect a temperature above the established safety temperature for perishable food products, all food sales will be inhibited.


USER INTERFACE: Selection panel with 12 push buttons and 32 digit alphanumeric LCD display.

STANDARD CONFIGURATION

BVM 676 CAN & BOTTLE for TRIO COMBINED

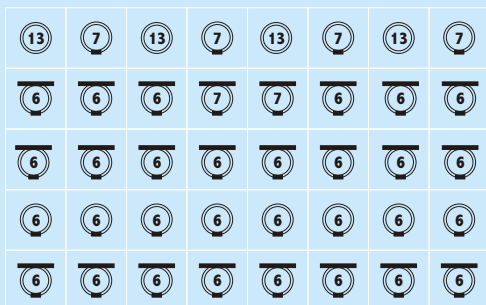

BVM 676 SNACK for TRIO COMBINED

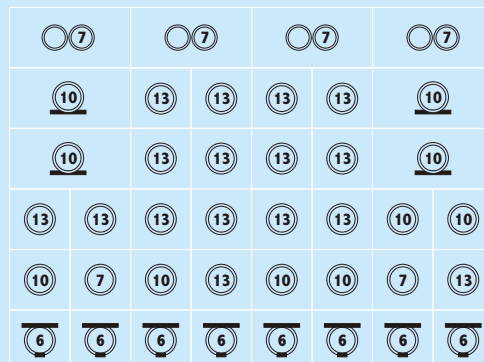

SIMPLE SPIRAL
 SPIRAL WITH PRODUCT SUPPORT
 SIMPLE SPIRAL WITH PRODUCT GUIDE
 SPIRAL WITH PRODUCT SUPPORT AND BOTTLE-NECK STOP BAR
 DOUBLE SPIRAL KIT LEFT/RIGHT WITH DOUBLE MOTOR

Bianchi Vending Group
 www.bianchivending.com
 info@bianchivending.com
 Head office:
 I 24049, Corso Africa 9
 Zingonia, Verdellino, BG
 tel. +39.035.419.6711
 fax +39.035.883.304
 Bergamo Plant:
 I 24040, Viale Parigi 5
 Zingonia di Verdellino, BG
 tel. +39.035.882.225
 fax +39.035.883.304
 Latina Plant:
 I 04010, Via Civitona 6/8
 Cisterna di Latina, LT
 tel. +39.069.689.1000
 fax +39.069.689.1107
 Pescara Plant:
 I 65013, V.le L. Petrucci 91
 Città S. Angelo, PE
 tel. +39.085.950.871
 fax +39.085.959.223



A GENERAL ELECTRIC PARTICIPATED COMPANY

CERT. N° 9105.BNVD



ISO 9001:2000